


INFRARED THERMOMETER




IP65 HACCP IR + Pt100 Thermometer 8838


- Follow HACCP principle to check food safety
- Quick to inspect danger zone temperature
- Quick and accurate IR response time:500ms
- Count down timer ensure food safety storage
- Flip over probe for internal temperature measurement
- IR emissivity rate preset at 0.97
- Built-in illuminator to highlight the area
- Max reading displays while in IR scanning status

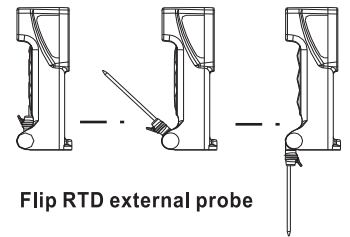


Measuring mode :
Max,hold IR (Non-contact) and probe (Contact)
Temp. Display



HACCP Check:
The indicator light will flash to indicate the measured temperature



Countdown (Timer) setting:
Based on HACCP inspection intervals

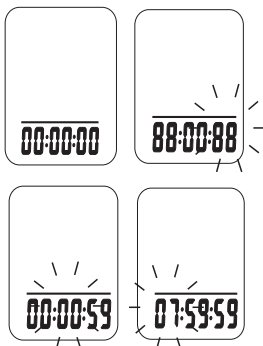

Ordering Code
VZ8838AZ, 8838 IR+Pt100 thermometer

| Model | 8838 |
|---|--|
| Temp. range | -40~280°C |
| IR Temp. resolution | 0.1°C/°F |
| Temp. accuracy (at operating temp.:23°C±2°C) | <0°C (32°F): +/-1°C (2°F) +/-0.1 0~65°C (32~150°F): +/-1°C (2°F) >65°C (150°F): +/-1.5% of rdg |
| RTD-probe temp. | -40~200°C |
| RTD-probe resolution | 0.1°C/°F |
| RTD-probe accuracy | <-5°C (23°F): +/-1°C (2°F) <65°C (150°F): +/-1°C or 1.5% of rdg -5~65°C (23~150°F): +/-0.5°C (1°F) |
| Probe length | 82mm |
| IR repeatability | +/-1°C |
| Emissivity | 0.97 |
| D:S ratio | 3:1 |
| LCD size | 21(W)x28(H)mm |
| Operating temp. | 0~50°C |
| Operating RH% | Humidity < 80% |
| Storage temp. | -20~50°C |
| Storage RH% | Humidity < 90% |
| Dimension | 61.5x35.5x167mm |
| Weight | 140g |
| Battery | 9V battery x 1pc |
| Optional | Pouch |
| Standard Package | Meter/Battery/Manual/Paper box |



POUCH (SOFT CARRYING CASE)
P/N: VM68926U
COLOR: BLACK
SIZE:176X75X35MM

