



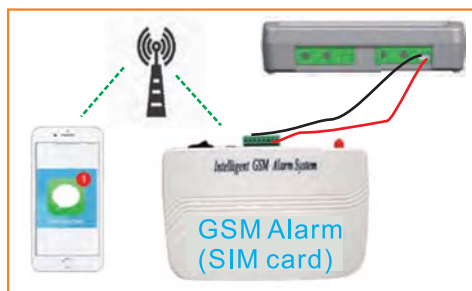

## 4 Channel NTC thermistor SD Card Logger with relay 88597

- Super big LCD portable / wallmount SD card logger
- Measure and Log 4 temperature at once by using quick response NTC thermistor probes
- High/low alarm of each channel with relay output is programmable
- One button operation to display T1-T2
- Display temperature change from baseline
- Temperature offset function for adjustment purpose

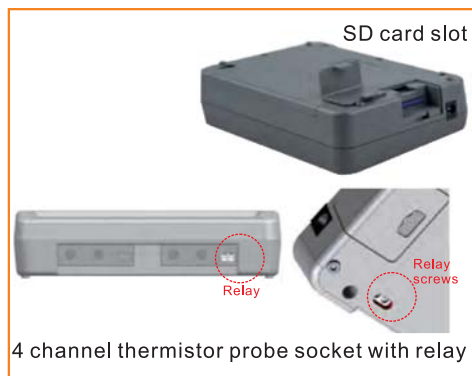

**No bothering computer setting!!**  
**Log anytime anywhere!!**  
**Trigger external alarm system!!**  
**Big display!!**

Model	88597
Thermistor temp. range	-30~70°C , -22~158°F
Temp. resolution	0.1°C , 0.1°F
Temp. Accuracy	0.5°C
Relay	A normal open contact Contact rating @resistive load:1A 30VDC/0.5A 125VAC
Sampling rate	Programmable from 1 second up
LCD size (mm, HxW)	47x104
Operating temp.	0~50°C
Operating RH%	Humidity < 80%
Storage temp.	-20~50°C
Storage RH%	Humidity < 90%
Dimension(mm,LxWxT)	152x100x39
Weight	~300g
Battery	4pcs AA alkaline batteries or 9V adaptor
Standard Package	Meter, 4pcs thermistor probes(87P6AZ2), battery, manual, SD card, plain box
Optional Accessory	9V adaptor, thermistor probes



### Ordering Code

VZ88597AZ, 88597 logger  
 VZ87P6AZ1, probe with handle  
 VZ87P6AZ2, probe without handle  
 VB1099EX, 9V universal adaptor



**EXTERNAL TEMP. PROBE**  
 P/N: VZ87P6AZ1  
 Color: Black  
 Size:15cm stainless probe w/handle  
 Cable: 116cm W/3.5mm Jack  
**EXTERNAL TEMP. PROBE**  
 P/N: VZ87P6AZ2  
 Color: black  
 Size:2cm stainless probe w/o handle  
 Cable: 200cm w/3.5mm jack



**9V UNIVERSAL ADAPTOR**  
 P/N:VB1099EX  
 Input:100~240 VDC  
 Output:9VDC, 0.9A  
 3 plugs included:US/UK/EU