


The Thermal Imager is designed for Non-contact detection and calculation of apparent surface temperature, fully radiometric imagers are ideal for troubleshooting electrical systems, electro-mechanical equipment, process equipment, HVAC/R equipment and others.

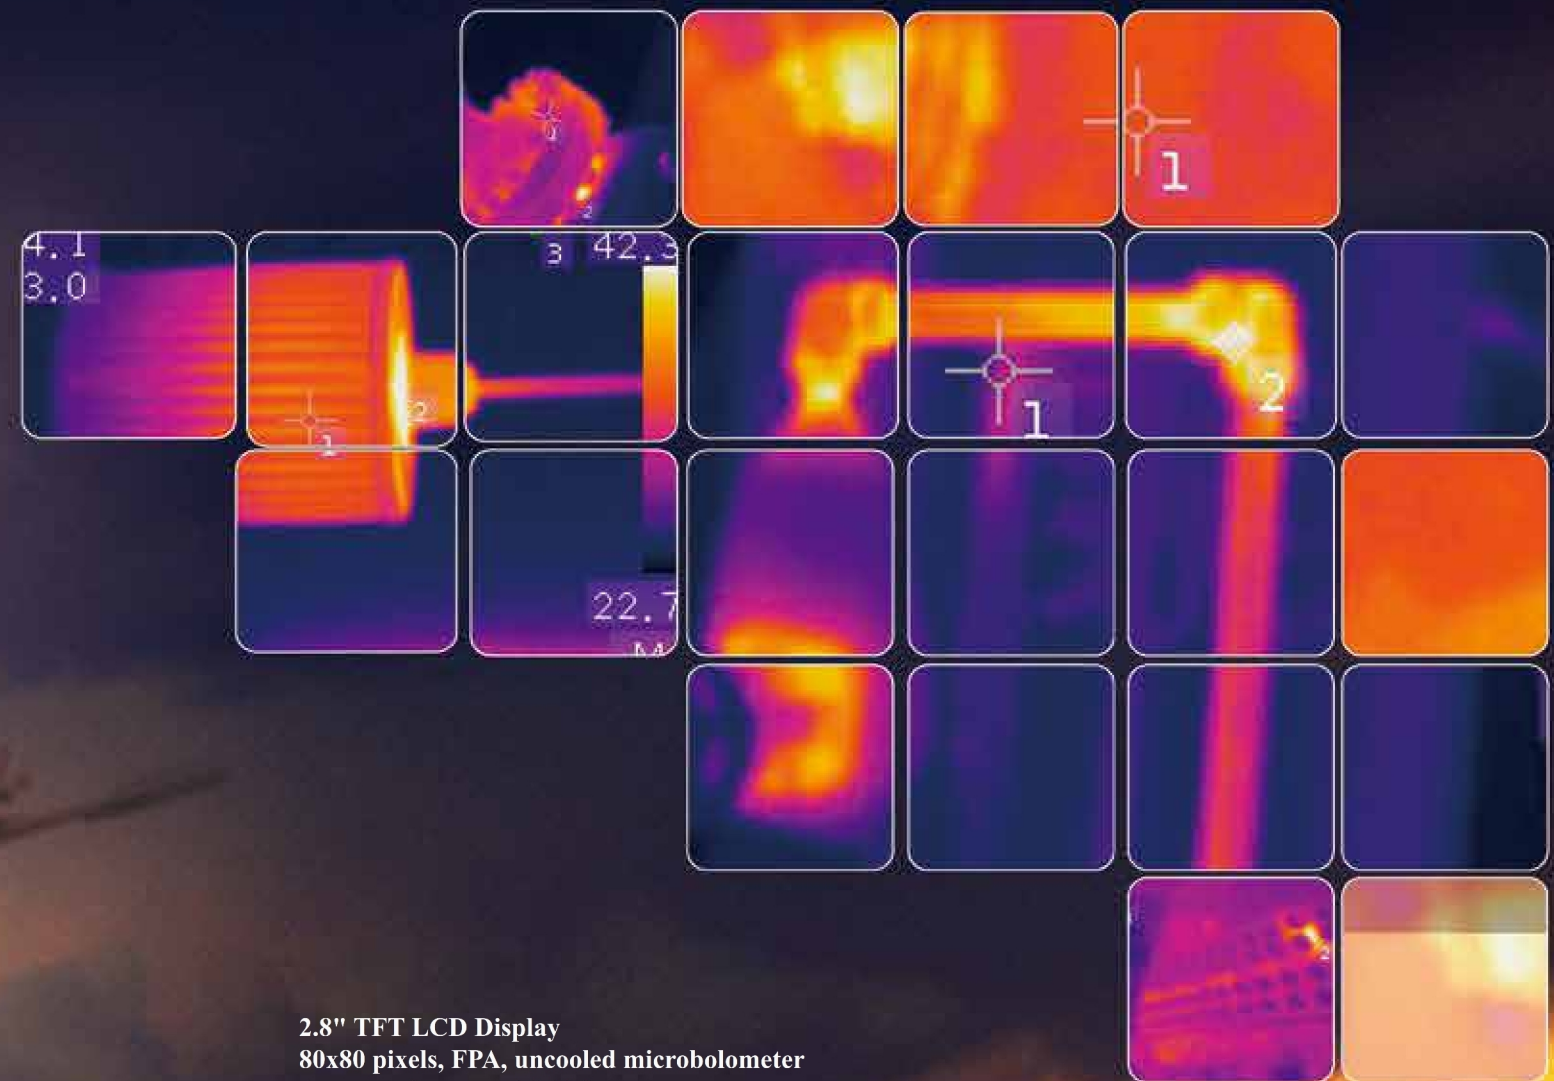

2.8" TFT LCD Display
80x80 pixels, FPA, uncooled microbolometer
Annotate images with Voice
Picture in Picture
32X Continuous Zoom
5 Megapixels Digital camera

HDMI High resolution video output
Built-in 100M Memory for 80 pictures or one minute video record
Wi-Fi connectivity
Transfers images and data to mobile devices to share reports and critical information quickly (983 only)

Professional InfraRed Video Thermometers with TFT color LCD display & Imager Video format



Cloud Server



Worldwide Patent:
PCT/CN2010/000230
200910189276.8
200920261924.1

EMC
EN: 61326
EN: 60825-1



Dual laser targeting & D:S = 75:1



JPG images / 3GP videos & Audio Recording



High accuracy (1.0%) measurement



Fold reading on the images

Applications

- Plant/General Maintenance
- HVAC/R
- Transportation/Automotive
- Cooling and Reheating
- Serving areas
- Food service Equipment



2.2" TFT color LCD display



Support **Images**(JPEG) capture capabilities



Support **Video**(3GP) capture capabilities



Support **IR, K-Type, Air, Dewpoint, Wet bulb Temp. & Air Humidity** measurement


Dual-laser targeting

Date/Time setup controls

USB interface

Data Logger

Support **MicroSD** memory card extension



9860/9861/9862/9863/9865 Series Professional Infrared Video Thermometers with 2.2" color TFT LCD display & a microSD memory card for capturing images(JPEG) or video(3GP) for viewing on your PC, providing fast, easy and accurate readings for most surface temperature measurements. The measurement of dewpoint will be very visible for wet and dry proof. These serials products are with international patent and good hands for industrial measurements and data analyzing. The user can be back in office to analyze the measured Infrared temperature readings under the support of software.

Worldwide Patent:
PCT/CN2010/000230
200910189276.8
200920261924.1

2.2" TFT Color LCD display

Capturing images(JPEG)
75 : 1 distance to spot size

- High 75 : 1 / 50 : 1 distance to target ratio measures smaller surface areas at greater distances
- IR temperature measurement
- Air temperature and type K probe temperature measurement
- Relative humidity measurement
- Wet bulb temperature & dewpoint temperature measurement
- Unique flat surface, modern housing design

Features

	9860/9860S	9861/9861S	9862/9862S	9863	9865
2.2" TFT 320x240 pixels Color LCD display	*	*	*	*	*
Camera pixels	640x480	640x480	640x480	3.0 Mega	3.0 Mega
Images(JPEG) & Video(3GP)	*	*	*	*	*
MicroSD memory card & datalogger function	*	*	*	*	*
Dual laser targeting	*	*	*	*	*
Date/time setup controls	*	*	*	*	*
Auto Power Off	*	*	*	*	*
High Temperature	*	*	*	*	*
Max, Min, DIF, AVG record	*	*	*	*	*
High and low alarm	*	*	*	*	*
Adjustable emissivity & Trigger lock	*	*	*	*	*
Type K input	*	*	*	*	*
USB/ bluetooth interface	USB	USB	USB	USB/Bluetooth	USB/Bluetooth
Readings memories	*	*	*	*	*
Humidity & Air Temperature	*	*	*	*	*
Dewpoint & Wet bulb temperature	*	*	*	*	*
Audio Recording	*	*	*	*	*
Language selection	English, Chinese, French, German, Spanish				

Specifications

	9860/9860S	9861/9861S	9862/9862S	9863	9865
IR Temp. Range	-50°C to 1000°C -58°F to 1832°F	-50°C to 1600°C -58°F to 2912°F	-50°C to 2200°C -58°F to 3992°F	-50°C to 1000°C -58°F to 1832°F	-50°C to 2300°C -58°F to 4172°F
Response Time	Less than 300ms; Less than 150ms(9860S/9861S/9862S)				
Resolution	0.1° up 1000°, 1° over 1000°				
Basic Accuracy (IR)	±1.0% of reading				
Optical Resolution	50:1 Distance to Spot size			75:1 Distance to Spot size	
Emissivity Adjustable	0.10~1.0 Adjustable				
Type K Temp. Range	-50°C to 1370°C / -58°F to 2498°F				
Basic Accuracy (TK)	±0.5% of reading ±1°C				
Micro SD memory card	MAX. support 8GB				
Air Temp Range	0 to 50°C/32 to 122°F				
Air Temp Basic Accuracy	±0.5°C/1°F				
Humidity Range	0 to 100%RH				
Humidity Basic Accuracy	±2.5%RH(20%~80%RH)				
Dew Point Temp. Range	0 to 50°C/32 to 122°F				
Wet Bulb Temp. Range	0 to 50°C/32 to 122°F				



Size(HxWxD): 125mm x 58mm x 205mm
Weight: 494g
Accessories:
3.7V Li battery, Type K Temp. probe, USB cable, Carrying case and Gift box



Temperature probe
(Optional: NR-31B / TP-500 / TCP-100)



Model 9863