

## Wet Bulb Dry Bulb Hygrometer 8760/87601/8762

- Excellent for green house, high humidity, harsh & dusty environment. Condensation caused by water/ pesticide/ fertilizer spray and dust scrap have very limited effect on humidity reading.
- Designed with two thermistor sensors to get accurate & quick temperature & humidity reading by using dry bulb & wet bulb principle
- Built-in fan to speed up the response time to 2 mins
- Dual color LED indicator for logging and alarm
- Humidity self-calibration is not required




8762



87601



8760

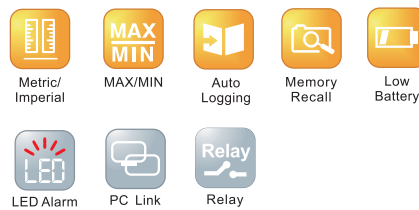

Model	8762	8760	87601
Temp. range		5~50°C	
Temp. resolution		0.1°C/°F	
Temp. accuracy		+/-0.6°C	
Humidity. range		0.1%RH~99.9%RH	
Humidity resolution		0.1%RH	
Humidity accuracy		+/-3%(10~100%RH@25°C), the rest is +/-5%	
Response time		120 seconds typical	
LCD size (mm)		25(H)x40(W)	
Memory	100 points	100 points	16000 points
PC download	NO, manually recall	NO, manually recall	YES
Relay	YES	NO	NO
Operation temp.		5~50°C	
Operation RH%		Humidity < 100%	
Storage temp.		0~50°C	
Storage RH%		Humidity < 80%	
Water Tank Refill Time		Every two weeks	
Dimension(mm)		48.4x178.5x24.7(H)	
Weight		~250g	
Battery		AAA x 4pcs or 5V adaptor	
Standard Package		Meter/Water tank/ Battery/Manual/Paper box /Cotton thread	
Optional Package		5V universal adaptor software cable & CD (87601 only)	

### Ordering Code

VZ8762AZ, 8762 hygrometer  
 VZ87601AZ, 87601 hygrometer  
 V8760AZ, 8760 hygrometer  
 VZ12405AZ, 5V universal adaptor  
 VZUSBND, software kit w/USB cable for 87601  
 VW38819A, a relay output wire for 8762



Power with relay or PC port



Side View



Hanger

Water Tank